

DIRECTIONAL WARNING LIGHT LED - just 15mm high


SPECIFICATIONS

- Voltage: 12-24V
- Nominal power: 12W or 18W (4x or 6x LED)
- Flash patterns: 21 patterns (amber or blue)
- Housing: aluminium
- Ingress protection: IP67, IP69K
- Approvals: ECE R65 / ECE R10
- Operating temperature: from -40°C to +60°C
- Installation: 2x screw
L-shaped bracket included







ELEX59126-B

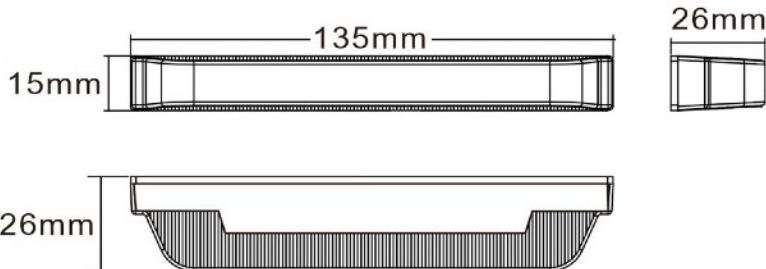L-shaped bracket included



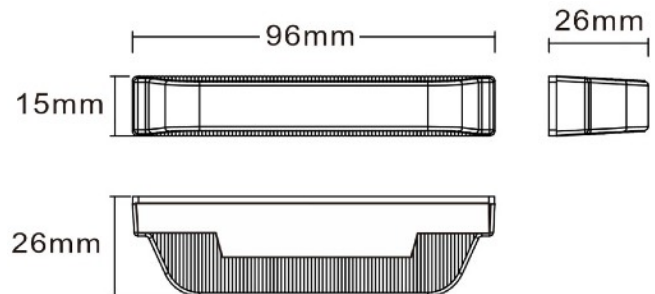



ELEX59124-O



Positive VDC “+”		red
Negative / ground “-”		black
Flash pattern and SYNC ⁽¹⁾		yellow
Low intensity ⁽²⁾		white

(1) To change the flashing pattern, apply the **yellow** wire to the **black** wire. Less than 1s for the next pattern, 3 to 5s for the previous pattern, and 6 to 9s to return to pattern 1.
(2) To reduce the intensity, apply the **white** wire to the **black** wire.

PART NO.	COLOR	OPTIONAL COLOR	VOLTAGE	POWER / LEDs	INSTALLATION	APPROVAL	IP
ELEX59124-O			12-24V	12W / 4x LED	2x screw L-shaped bracket included	ECE R65 EMC R10	IP67 IP69K
ELEX59126-B				18W / 6x LED			